

Step-by-Step Instructions

Empty Refillable Compatible Cartridges

(PRINT this set of instructions to follow every time you refill your cartridge)

Brother Continuous Ink Supply System LC 75



Items needed: Gloves, Syringe, Black Dye, Cyan, Magenta, Yellow Inks, 1 Cover Part, 4 Air Filters, 2 Pipeline Clinchers, Paper Towels, Review Hints and Tips, and Checklist.

Before using this product, please open and make sure your CISS package has all the accessories included

- Continuous Ink System
- Air Filters (4)
- Door lever
- Pipeline Clinchers

NOTE: Before you start filling your CISS System, take out your old cartridges to be replaced out from the printer and power off your printer.

Starting your new CISS LC 75 System



1. Remove the big color plug on the tank. This is your fill hole. The small plug located across from the big plug is your air vent hole (Leave the air vent hole plugged). Each tank will hold approximately 95ml.

2. Attach the syringe to the needle tip. Fill the syringe up to 10ml of the correct color ink.

3. Insert the needle tip into the fill hole. S-l-o-w-l-y inject the ink into the fill hole of the tank.

REPEAT Steps 2 and 3 until the tank is halfway filled or 3/4 filled from the top. Leave an air space at the top of the tank.

4. After the tank is filled with ink, seal the fill hole with the big color plug.


5. Remove the small plug from the air vent hole of all four tanks and place the air filters with the thicker



end into the air vent holes.

5. On top of the cartridge locate the clear plastic plug. Remove the clear plastic plug.

6. Using a syringe without the needle tip, place it where you have removed the clear plastic plug and insert the syringe into the hole so it is air tight and creates a vacuum. Pull the plunger back until you see ink flowing through the tubes and into the cartridges. Once the cartridges are 1/2 full with ink, repeat the same steps to all the remainder cartridges. See picture below:

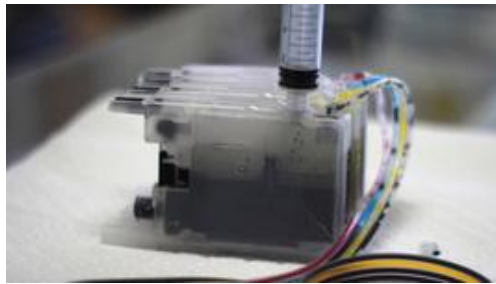

7. Once all the above steps have been completed, Power ON your printer.

8. Start placing the cartridges into the printer, one cartridge at a time. Be sure the cartridges clicks into the cartridge slot.

Note: The tanks will sit outside of the printer. Be sure to keep your ink tanks at the same level of your printer. Whenever you run low on ink, you will refill from the tanks only.

9. Using the black cover part or the levers that came with the CISS, you will need to place that in your printer. This will trick the printer to think the door is closed. Refer to the images below:



Depending on your type of Model Printer, it may require door levers. Refer to the image picture below:



11. The clear plastic flaps are called pipelines clinchers. They are used to hold the pipelines in place. Peel off the green plastic and place it where it is most comfortable for you. For example:



10. Run the Ink Test Print and Cleaning cycles.

To test print click here:

http://www.freeink4life.com/black_print_test.html Black Ink Test

http://www.freeink4life.com/color_print_test.html Color Ink Test

AccuBrite, Inc. is not affiliated with the listed printer manufacturers or their subsidiaries. The use by AccuBrite, Inc. does not imply endorsement by or association with the brand name owners. The listed manufacturers, printers and cartridges are used only for the purpose of showing the compatibility of this AccuBrite, Inc. product. All other trademarks, brand names and logos referenced in or on this product are the property of their respective owners. This material is protected by the copyright laws of the United States and other countries. It is illegal to reproduce these instructions. It may not be reproduced, distributed, or altered in any fashion by any entity (either internal or external to AccuBrite), except in accordance with applicable agreements or contracts of licensing, without the express written consent of AccuBrite, Inc.

Copyright © AccuBrite, Inc. 2003-2012. All rights reserved