


Step-by-Step Instructions

(PRINT this set of instructions to follow every time you refill your cartridge)

Hewlett Packard # 901 (CC653A) Black Pigment

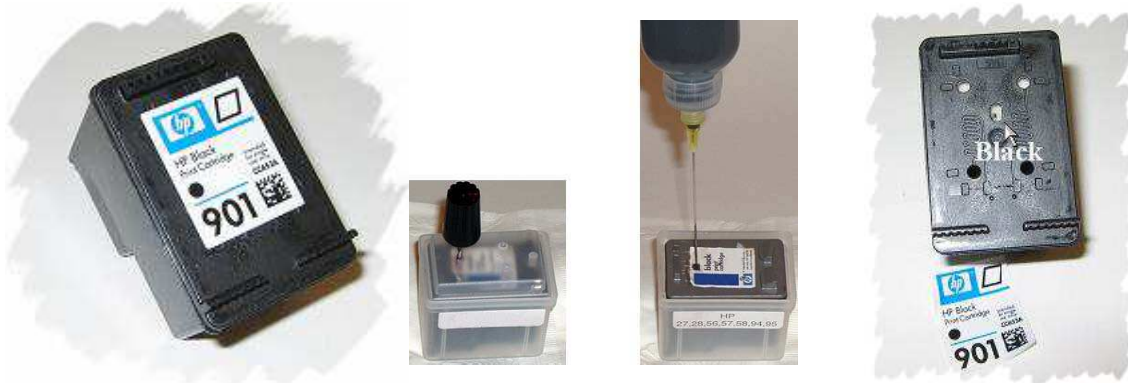

Items needed: gloves pigmented black ink, drill, #5 refill station, paper towels, review hints & tips and check list. Do not plug fill holes.

Syringe: Attach needle tip (located inside station # 4) to the syringe tightly. Unscrew lid on ink bottle. Puncture silver seal with needle tip making a small hole in the center of seal. Using the correct color pull the correct amount of ink into the syringe. Rinse syringe and needle tip after every use and before using syringe with another color. Rinse syringe and needle tip with water until the water runs clear.

1. Place cartridge in Station #5 with copper circuits facing to the left and the plastic feet inside the bottom of the station to your right. Refill station lid has three holes. Place the lid on cartridge with single hole on the left and double holes on the right. Make sure lid snaps down over top of cartridge.

2. Insert the drill into the single hole on the left side of the lid. Make sure the drill goes thru the lid and deep into the inkjet cartridge below. Remove the lid from cartridge. Leave cartridge in refill station.

3. S-l-o-w-l-y release thru the syringe up to 8 ml. of black pigment ink. If ink begins to "bubble" out of the fill-hole, remove bottle tip. **As you inject the ink withdraw and re-insert the syringe at different angles in order to expose the whole sponge to the ink.** Bubbling occurs when a cartridge is either over-filled or if ink is being inserted too quickly. Wait several minutes and then try to slowly insert more ink. If ink begins to bubble out the fill-hole or leak from the printhead, you have plenty of ink in the cartridge.

4. Very S-L-O-W-L-Y inject ink into the middle hole or the two top holes, they all go into the same sponge. Half of this cartridge has a sponge. The two bottom holes are just air and are not used. Do not put ink into them.

5. To test black printing, replace the cartridge and run 1 - 3 cleaning cycles as per printer instructions. Or print 2 pages at this test site

http://www.refills4you.com/support/black_print_test.html Black ink test

http://www.refills4you.com/support/color_print_test.html Color ink Test

For best results, let cartridge sit for 8 hours after refilling so the ink can saturate the entire sponge.

AccuBrite, Inc. is not affiliated with the listed printer manufacturers or their subsidiaries. The use by AccuBrite, Inc. does not imply endorsement by or association with the brand name owners. The listed manufacturers, printers and cartridges are used only for the purpose of showing the compatibility of this AccuBrite, Inc. product. All other trademarks, brand names and logos referenced in or on this product are the property of their respective owners. This material is protected by the copyright laws of the United States and other countries. It is illegal to reproduce these instructions. It may not be reproduced, distributed, or altered in any fashion by any entity (either internal or external to AccuBrite), except in accordance with applicable agreements or contracts of licensing, without the express written consent of AccuBrite, Inc.

Copyright © AccuBrite, Inc. 2003-2008. All rights reserved