


# Step-by-Step Instructions

(PRINT this set of instructions to follow every time you refill your cartridge)

## Hewlett Packard #60 Color

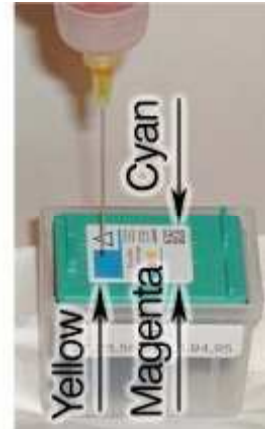

**Items Needed:** gloves, cyan, yellow & magenta ink, hand-drill, #5 refill station, paper towels, review hints & tips and check list **Do not plug fill holes.** **Syringe:** Attach needle tip (located inside station # 4) to the syringe tightly. **Unscrew lid on ink bottle.** Puncture silver seal with needle tip making a small hole in the center of seal. Using the correct color pull the correct amount of ink into the syringe. Rinse syringe and needle tip after every use and before using syringe with another color. Rinse syringe and needle tip with water until the water runs clear.

1.) Place cartridge in Station #5 with copper circuits facing to the left and the plastic feet inside the bottom of the station to your right. Refill station lid has three holes. Place the lid on cartridge with single hole on the left and double holes on the right. Make sure lid snaps down over top of cartridge.

2.) One by one, insert drill into each of the three holes and down into the inkjet cartridge. You will have three fill holes for this cartridge. Rinse and dry drill after inserting into each color chamber.

3.) Remove the lid from cartridge. Leave cartridge in refill station.

4.) Insert the correct color ink using the syringe inside of each of the fill-holes. See picture and fill colors as shown. S-l-o-w-l-y inject 3 ml of ink into each of the three fill-holes. If ink begins to “bubble” out of the fill-hole, remove bottle tip. **As you inject the ink withdraw and re-insert the syringe at different angles in order to expose the whole sponge to the ink.** Bubbling occurs when a cartridge is either over-filled or if ink is being inserted too quickly. Wait several minutes and then try to slowly insert more ink. If ink begins to bubble out the fill-hole or leak from the printhead, you have plenty of ink in the cartridge.

5.) After refilling, remove cartridge from refill station. Without the cartridge “printhead” touching the paper towels, place refilled cartridge upright upon folded paper towels and tilt cartridge at a slight angle. If the printhead on the cartridge is touching the paper towel, it could create a wicking effect which would pull the ink from your refilled cartridge. It is necessary for your cartridge to sit for at least 20 minutes after refilling because there maybe some minor leakage from the cartridge. Never put a leaking cartridge back into your printer.

**For best results, let cartridge sit for 8 hours after refilling so the ink can saturate the entire sponge.**

6.) Do not plug fill-holes.

7.) Check the ink flow by gently pressing a dry paper towel against the printhead. You should see 3 small lines of each color. If not, gently press a warm, wet paper towel against the printhead until each color is visible.

8.) When all 3 colors are visible on paper towel, place cartridge back into the printer and run 1-2 print tests. [Or Print 2 pages using:](#)

[http://www.refills4you.com/support/black\\_print\\_test.html](http://www.refills4you.com/support/black_print_test.html)    [black ink test](#)

[http://www.refills4you.com/support/color\\_print\\_test.html](http://www.refills4you.com/support/color_print_test.html)    [color ink test](#)

**PLEASE NOTE: Empty cartridges should be refilled immediately.** If you have tried printing with your cartridge completely out of ink, you may have damaged the printhead. Inkjet printers work by heating a resistor inside the printhead which heats the ink before it is sprayed onto the paper. If there is no ink to keep the resistors cool, you stand the chance of frying them. In your worst case you will need to buy a new cartridge.

**AccuBrite, Inc. is not affiliated with the listed printer manufacturers or their subsidiaries. The use by AccuBrite, Inc. does not imply endorsement by or association with the brand name owners. The listed manufacturers, printers and cartridges are used only for the purpose of showing the compatibility of this**

**AccuBrite, Inc. product. All other trademarks, brand names and logos referenced in or on this product are the property of their respective owners. This material is protected by the copyright laws of the United States and other countries. It is illegal to reproduce these instructions. It may not be reproduced, distributed, or altered in any fashion by any entity (either internal or external to AccuBrite), except in accordance with applicable agreements or contracts of licensing, without the express written consent of AccuBrite, Inc.**

**Copyright © AccuBrite, Inc. 2003-2008. All rights reserved**